

8
9 **Photovoltaic Design Integration at Battery Park City, New York**

10 **Simone Medio**

11 School of Architecture, University of Lincoln, Brayford Pool, LN6 7TS, UK;
12 E-mail: smedio@lincoln.ac.uk; Tel: +44 (0)1522 837181; Fax: +44 (0)1522 886041

13 *Received: / Accepted: / Published:*
14

15 **Abstract:** This paper is a study of the photovoltaic (PV) systems in the buildings' design of
16 the Battery Park City (BPC) residential development, in New York. The BPC development
17 is the first in the US to mandate, through the 2000 Battery Park City Authority guidelines,
18 the use of PV as renewable energy generation system in its individual buildings. The scope
19 of this study is to show how PV is integrated in the BPC buildings' design process, and what
20 can be learned for future PV applications. The study draws directly from the design decision
21 making sources, investigating on the concerns and suggestions of the BPC architects, PV
22 installers and real estate developers. It attempts to contrast a theoretical approach that sees
23 PV as a technology to domesticate in architecture and bring, through grounded research, PV
24 industry closer to the architectural design process. The findings of the study suggest that
25 while stringent environmental mandates help, in the short term, to kick-start the use of PV
26 systems in buildings, it is the recognition of the PV's primary role as energy provider, its
27 assimilation in the building industry, and its use in a less confining building program that
28 allows for its evolution in architecture.

29 **Keywords:** PV and design process; PV and building integration; role of PV in architecture;
30 PV innovation.
31

32 **1. Introduction**

33 PV cells transform the visible spectrum of solar radiation (photons) into electrical energy. The
34 greater the efficiency of the PV cell, the larger the PV surface area exposed, and the better the PV's
35 position in respect to the sun, the greater the total electrical output produced. It is important to
36 remember that initial use and testing of PV cells occurs in outer space. In 1958, PV cells were installed

1 in the satellite Vanguard to generate energy to power its radio transmitters. The event was significant
2 because it demonstrated the original scope and potential of PV: to effectively generate self-sufficient
3 energy from the sun. This machine-like function and high-tech aesthetic of PV remains fundamentally
4 unchanged and is arguably what challenges architects when PV systems are to be integrated in a
5 building's design. The integration of PV in architecture, however, can also potentially provide an
6 important supply of electricity for a building's energy demand and significantly contribute to the
7 reduction of carbon emissions. The application of PV systems in the BPC buildings represents a
8 challenge that architects face globally when presented with PV technology; that is: to make PV
9 perform and assimilate it as constituent part of the design process.

10 This paper explores how PV systems are integrated in the design process of the BPC buildings. The
11 scope of this paper is to show what can be learned from the BPC experience for future PV application
12 in architecture. The paper begins with a review of PV in architecture. It then gives a background of the
13 BPC development. The main body of the paper discusses the emerging themes stemming from the
14 architect's integration of PV in the BPC building's designs. Finally, the paper draws conclusions on
15 the integration of PV technology in the architectural design process.

16 *1.1 Research method*

17 The source material of this study originates from on-site video interviews carried out during the
18 construction process of the Battery Park City development in the period 30/9 – 11/10, 2009, with the
19 Battery Park City Authority (BPCA) director of sustainability, the architects in charge of the buildings
20 concerned, and the BPC PV installer. The raw interview data is transcribed and subjected to content
21 analysis to show emerging themes in the integration of PV in the building's design. The content of
22 each theme is interpreted through observation and literature review. Conclusions are then drawn from
23 the findings.

24 **2. PV in architecture – a review**

25 Literature on the application of PV in architecture is easily accessible and rapidly growing. This is
26 particularly the case for practical manuals and handbooks that provide architects with design
27 guidelines and case studies for integrating PV in their projects [1, 2, 3, 4, 5]. However, for an updated
28 view of the synergy between solar energy, PV industry and architecture, and a better understanding of
29 the forces in the implementation of PV in architectural design, we must refer to the International
30 Energy Agency Photovoltaic Power System (IEA-PVPS) annual reports [6] and program surveys [7].

31 Established in 1993, the mission of the IEA-PVPS programme is to accelerate and promote the
32 development and deployment of PV solar energy through information dissemination and a set of
33 scheduled tasks. The program's premise is that of PV as a sustainable renewable energy source that
34 can significantly contribute to the reduction of carbon emissions and world dependency on fossil fuels.
35 Central issues relevant to the introduction of PV in buildings, accountable for more than 40% of the
36 world's energy demands are PV economy, government incentives, and technological innovation. In
37 support of the advantages of integrating PV in buildings we find studies, from both IEA-PVPS

1 program and independent sources, which focus on the PV's economic, environmental and architectural
2 added value [8, 9, 10, 11].

3 Within the IEA–PVPS program tasks, Task7 [12, 13] and Task 10 [14, 15], are particular to the
4 implementation of PV in the built environment. More specifically, the goal of Task 7 is to enhance
5 PV's architectural and technical quality and its economic viability in the built environment, as well as
6 removing non-technical barriers (such as administrative and market related), while that of Task 10 to
7 enhance wide-scale, solution-oriented photovoltaic power production application in the urban
8 environment. However, the issue of PV architectural quality, which according to the author of this
9 paper is at the heart of PV integration architectural design process, is treated only as a subtask of Task
10 7 (subtask 1).


11 Subtask 1 is specifically aimed at providing architects with a set of criteria for successfully
12 integrating PV in architecture (design criteria for good quality PV-projects), with guidelines on how
13 PV can be incorporated in the building design process and a database of notable PV applications.
14 While recognizing the difficulty for PV technology to be fully incorporated in the design process,
15 Kaan & Reijenga [16] underline the value of Task 7 architectural criteria as a starting point for
16 architects to orient themselves when integrating PV in their designs. The argument is that, because PV
17 is not an indispensable material in architecture, it is seen by architects as an add-on element and in
18 need of an organized set of criteria. The view of PV as a separate added element of architecture is
19 evident in more recent publications [17] and, as will be shown, reinforced by those directly involved in
20 the design decision making process.

21 Arguably, the prevailing approach to PV's integration in architecture is top-down. It starts from the
22 PV industry, and the powerful arguments that support its proliferation, and pushes towards its
23 acceptance and incorporation in architecture. By contrast, the author of this paper would like to stress
24 on the importance of the contributions that go from the design process experience towards PV
25 industry. In this direction, and non-withstanding the specificity of its location, the BPC development
26 offers a unique opportunity of investigation. At BPC, within a framework of time, building program
27 and site, architects, PV installers and real estate developers, are called to respond to the introduction of
28 PV as mandatory requirement. This results in diverse design approaches and in emerging themes that
29 are perhaps a call from the world of architectural design to that of PV industry.

30 **3. The Battery Park City development**

31 The BPC development (see Figure1) is located on the south-west tip of Manhattan Island. It sits on
32 a reclaimed area of approx. 92 acres, and measures one mile end to end, all on the west of the West
33 Side highway.
34
35
36
37

Figure 1. (a) Plan of the BPC development. Photographs of the site looking: (b) south-east and (c) north-east. From: BPCA archive.

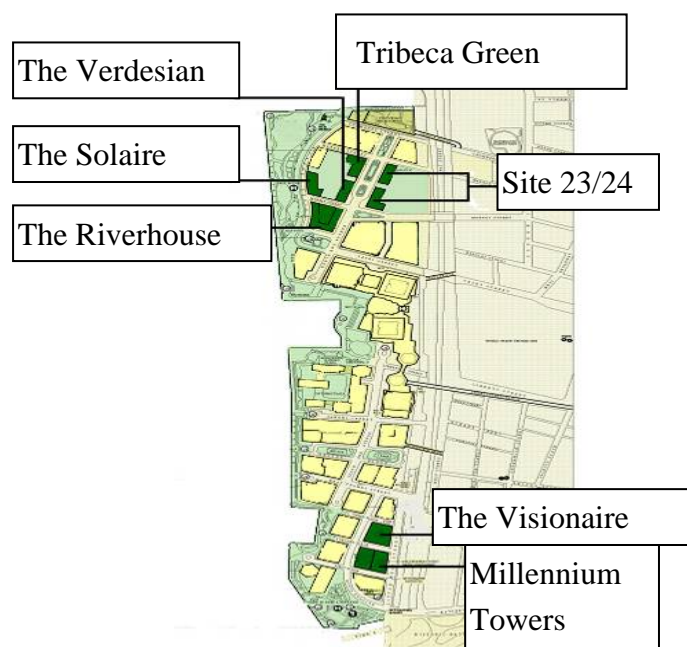

(a)



(b)



(c)

The idea of the BPC development starts in the mid sixties, following the dismantling of the shipping industry and the progressive decay of the piers jutting out onto the river. Susan Kaplan, Director of Sustainability at the BPCA explains how this large dysfunctional area on the waterfront was “seen by the then ex governor of New York, Nelson A. Rockefeller, as an opportunity to have full jurisdiction over buildable areas and, through the strategy of reclaimed land, start an entire new city jutting out from Manhattan Island” [20]. The development of BPC goes through two distinct phases that are visually experienced with a visit to the site. The first goes from the mid sixties to the new master plan of the 1979. It is defined by several master plans that result in closed communities such as the Gateway, which shows exclusion to street life and nature. The second phase stems from the 1979 master plan. This phase begins to include environmental considerations, primarily at an urban design scale, and can be considered the reference driver for the rest of the BPC development.

In 2000, the BPCA establishes the Hugh Lucre Residential Environmental Guidelines [18]. The formulation of the guidelines is coeval to the Leadership in Energy and Environmental Design (LEED) Green Building Rating System [19]. It distinguishes itself from LEED, however, by setting mandates, rather than options, with stringent requirements for the provision of renewable energy and green power sources. The guidelines mandate that renewable energy sources be incorporated in the BPC building’s design to initially provide 5% of the base energy load of each building; that is: the load of the buildings’ non-tenanted spaces. Several studies are conducted to explore the different renewable energy options, including wind and biomass. The application of PV systems, however, quickly appears

1 to the developers as the most tested and economic option, and as such it is adopted in the BPC
2 buildings.

3 The BPC buildings under investigation, completed between 2003 and 2011, represent a test-case in
4 PV application. The details of these buildings is shown below, in Table 1. All the buildings follow tight
5 zoning and geometric constraints on massing, orientation, and envelope directives (i.e. the façade's
6 ratio of opaque to transparent).

7

8

9 **Table 1:** BPC buildings under investigation.

10

Name of building	Design (start)	Construction (completion)	Use and location of PV	Design architect
The Solaire	2000	2003	West façade BIPV and bulkhead*(south and west facing walls). Entrance canopy (west)	Pelli Clarke Pelli Architects
Tribeca Green	2000	2005	Bulkhead (east, west and south facing walls)	Rober A.M. Stern Architects
The Verdesian	2003	2006	Bulkhead (primarily east and west facing walls)	Pelli Clarke Pelli Architects
Millenium Tower	2004	2007	Bulkhead (west facing wall)	Handel Architects
The Riverhouse	2004	2008	PV tracking array at rooftop level (east, west and south racks)	ENNEAD Architects
The Visionaire	2005	2008	West and east façade BIPV	Pelli Clarke Pelli Architects
Liberty One and Liberty Two	2006	2011	PV trellises at lower rooftops and on top of bulkheads of both buildings	EE&K Architects
* Bulkhead: structure on the roof housing mechanical systems and other installations.				

11

12 **4. Emerging themes**

13 The emerging themes from the interviews are categorized in 4 sections, namely: The 'carrot and the
14 stick' (discusses the effects of mandating PV systems in the BPC development); PV and building
15 integration (discusses the architect's different approaches to PV integration in the design process); PV
16 industry and design process (discusses the difficult relationship between PV industry and the design
17 process); Green visible (brings out the PV overall prevailing function at BPC, comparing the short
18 term symbolic function of PV with its potential long term goal).

19 *4.1 The 'carrot and the stick'*

20 Residential development is an exceedingly money conscious sector of the building industry. New
21 built residential buildings must generate a certain pre-calculated return, and anything outside of a

1 tested financial program is seen with scepticism, and as a risk. Kaplan, states that having mandated the
2 use of PV as renewable generation system through the BPCA residential guidelines has fostered the
3 development of the PV industry in the residential sector [20]. According to Anthony Pereira [21],
4 President and CEO of AltPower, the BPC PV installer, “the reality is that if you did not use the stick,
5 no one would apply the technology, no matter what the incentive. The stick had to happen for it to
6 happen”. For the scope of this study, the question is: what effect did the mandatory inclusion of PV
7 have on the BPC architects and developers?

8 4.1.1. The stick 9

10 From the interviews carried out on the buildings under investigation, the architect’s general
11 consensus is that, were PV systems not required through regulation, they would not have been
12 considered in the building’s design. David Hess, project manager of the Solaire (see Figure 2 and 3)
13 and the Verdesian (see Figure 5) buildings goes as far as stating that no one in the design team would
14 have of their own choice considered PV, and indeed any on-site renewable energy source, as an option
15 to promote green design [22]. Overall, the BPC architects welcomed the PV challenge, but saw it more
16 as part of a program to carry through, than a design challenge. There are multiple reasons that perhaps
17 explain this sentiment. Firstly, the requirement for the PV to provide 5% of the base building load was
18 seen as minimal and inconsistent for a full engagement of PV into a comprehensive design project.
19 Secondly, overshadowing studies showed that solar access was limited to specific fronts of each
20 building, limiting the architect’s design options in terms of PV location and positioning. Thirdly, the
21 building’s fixed massing, orientation, and envelope requirements prevented any real spatial
22 contribution of the PV to the building’s form. Under these terms, it could be assumed that PV was not
23 considered by the architects on their own accord because it hindered the very nature of the architectural
24 design process: at the design conceptual phase, there was limited scope for PV becoming a
25 participatory element of the design, and PV systems tended to be considered as an add-on element.
26 From a developer’s perspective, independently of economic reasons, PV represented a risk. Real estate
27 developers tend to offer buildings that are as neutral as possible to increase the range of potential
28 clients, and there was no precedence to show how NYC clients would respond to a PV clad building.
29

30 4.1.2. The carrot

31 It is suggested, however, that it is the very challenges posed by the introduction of PV in the city
32 and the stringent building and environmental guidelines set by the BPCA that has triggered a set of
33 attractive advantages for architects and developers. To begin with, architects were given the
34 opportunity to show, in a highly visible way, the environmental commitment of their practice. BPC has
35 also shown to be an incubator for the use of PV in the city, drawing architects and developers to use
36 PV in their future projects, and engage in the use of PV systems with more confidence. An example is
37 the Helena building in New York by Fox and Fowle architects, completed in 2005. As PV installer of
38 the Helena, Anthony Pereira [21] states that the decision to include PV in the building’s design agenda
39 was fostered by the physical evidence provided by the BPC buildings, bringing forth confidence to the
40 PV initiative. Likewise, the Albanese Developing Corporation, developer of the Solaire, the Verdesian
41 and the Visionaire has, since their experience at BPC, started to incorporate green buildings strategies

1 as a norm, with the inclusion of PV in most of their projects. Most importantly, the BPC development
2 has triggered the activation of PV government financial support and tax breaks incentives, making the
3 inclusion of PV in buildings' more attractive to clients, architects and developers, expanding the use of
4 PV in architecture and pushing for innovative solutions.

5 6 4.2. PV and building integration

7 The definition of a building integrated PV system (BIPV) is that of an energy generating PV surface
8 that also takes on one or more of the functions of the building envelope components. Such functions
9 could be, for example, insulation, rain screen, or a shading device. At best, a PV assembly can serve,
10 besides the energy requirements of a building, many architectural functions combined, offsetting the
11 total cost of a building construction. A full integration of PV in buildings is arguably one, however,
12 where PV is assimilated in the design process and becomes a constituent part of a building's
13 resolution. The BPC architect's address this issue in different ways. In doing so, they show evidence of
14 a split in the PV's potential role as efficient energy provider, building component, and aesthetic
15 complement. Shown below an exposition of the buildings considered in this study.

16 17 4.2.1. The Solaire

18 The Solaire (see Figure 2 and 3) is the second building in New York City to integrate PV systems
19 (the first is 4 Times Square, located in mid-town Manhattan, about 6 kilometers north of Battery Park
20 City). The Solaire's project manager describes how sunlight geometry simulation studies showed the
21 Solaire's PV effective surfaces limited to the building's west façade, overlooking the Hudson river,
22 and to the building's bulkhead [22]. In these two zones, the design approach to PV integration is
23 notably different.

24
25 **Figure 2.** The Solaire's west façade,
seen from the pathway. From: BPCA
archive.



26
27
28
29
30
31 **Figure 3.** The Solaire's bulkhead.
From: author.




32 In the west façade, the custom-made PV panels are designed as building cladding. In energy terms
33 they benefit from the afternoon sun and its reflections bouncing off the river. Their prevailing function,
34 however, verges towards an aesthetics tour de force, with the unprecedented challenge of relating the
35 building's PV facade to the public at pedestrian level. The PV systems in the Solaire's bulkhead are,

1 by contrast, off-the-shelf modules. They are added to complement the energy requirements set by the
2 BPCA and, compared to the west façade, their aesthetic pursuit is negligible, highlighting the
3 difficulty in making BIPV a constituent part of a comprehensive, all round design resolution.

4 4.2.2 Tribeca Green, Millennium Tower, Site 23 and 24

5
6 These buildings (see Figure 4) are designed at different intervals during the BPC development; they
7 show, however, similarities in their design approach. Besides meeting the energy requirements, the PV
8 panels serve at most the additional function of rain screen to the building's bulkhead, as in Tribeca
9 Green and the Millennium Tower, or as rooftop trellises and on top of the bulkhead, in the Site 23 and
10 24 buildings.

11
12 **Figure 4.** PV in: (a) Tribeca Green; (b) Millenium Tower; (c) Site 23 and 24. From: Costas
13 Kondylis and Partners.

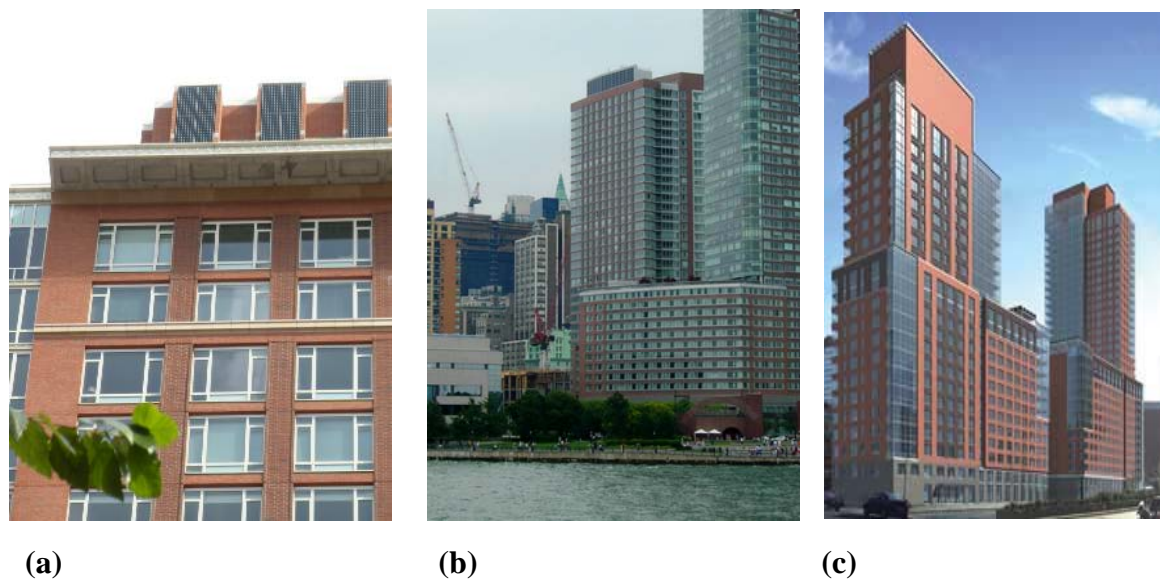

23 Considering that PV application needs to gain regulation approval and any proposal that goes
24 beyond tested solutions may not be realized, the design approach to PV in the above buildings is non-
25 risk taking. Once the energy requirements are met, and a satisfactory aesthetic solution is achieved,
26 there is no further push towards finding innovative ways to include PV in the design process. Such
27 approach is stressed in the Site 23 and 24 designs, where the architects ensure an effective application
28 of PV by considering upfront what would meet the BPCA requirement and building regulation [20,
29 23]. In the Millennium Tower, PV panels are placed on the roof top as a PV stand alone system,
30 suggesting disengagement to the building's design composition process.

1

2 4.2.3 The Verdesian

3 In the Verdesian building (see Figure 5) the custom made PV panels cover primarily the east and
4 west of the building's bulkhead. Besides generating energy, their additional constructional role is of
5 rain screen for the mechanical rooms. It is important to note that the architects of this building insisted
6 on maintaining the vertical mullion aesthetics on its west façade all the way to the building's bulkhead.
7 The bulkhead's vents are for that reason located in the south façade, reducing the area of PV southern
8 exposure and consequently the PV system energy potential; a design choice that shows the priority
9 given to the aesthetic composition of the BIPV façade over its energy generating potential.

10

11 4.2.4 The Visionaire

12 The Visionaire's PV custom-made panels (see Figure 6) act as a full cladding system, incorporating
13 a ventilated cavity to avoid heat build up and loss of PV efficiency. The panels represent an example of
14 learn by doing, gathering from the Solaire's experience where the direct contact of the insulation to the
15 PV glass generates heat build up, and incorporating the technological improvements in the building
16 design process. In the Visionaire, the architects maintain the PV panels flush with the façade. In doing
17 so, however, they rely on a fixed building configuration and show, as in the Solaire, the domestication
18 of PV to an aesthetic and constructional role.

19

20 **Figure 5:** The Verdesian's bulkhead.
21 From: author.



22

23

24

25

26

27

28

29

30 4.2.5 The Riverhouse


31 The Riverhouse (see Figure 7 and 8) is one of the last buildings to be completed at BPC and,
32 perhaps because of that, one of the most innovative with PV application. The building's large volume
33 and base building energy demands would have required vast PV surfaces. The architects responded to
34 this requirement with a dynamic PV sunlight tracking system in the building's bulkhead, shown in
35 figure 8. The system crowns the building and allows an estimated 20% increase in efficiency when

1 compared to an equivalent solution with fixed PV [21]. Here, the PV does not substitute any
2 architectural building's component. This trade off, however, allows the PV to work freely and to
3 deliver what is arguably PV primary function to effectively generate energy from the sun.

4 **Figure 7:** The Riverhouse. From:
5 author.



Figure 8: The Riverhouse dynamic PV
system. From: author.

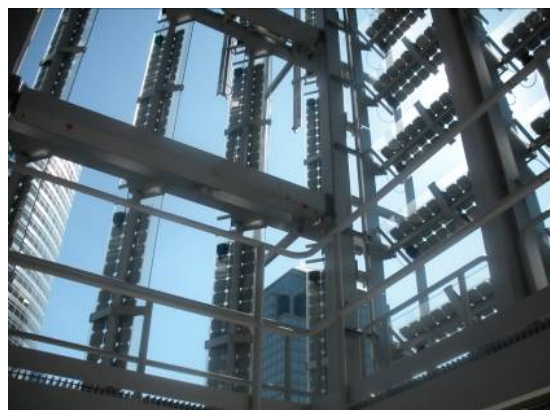

16 4.3 PV industry and the design process

17 When the BPC architects were asked about the single most important lesson learned on the
18 application of PV in the design process, the recurring theme is that of the difficult relationship
19 architects have with PV industry, and the need for PV versatility. That has obvious design implications
20 as each solution has to be valued by local jurisdictions, leaving the approval of each specific proposal
21 of PV integration uncertain. In this sense, the IEA-PVPS Task 7 architectural criteria is perhaps a
22 testimony of the need to find a common ground between what the PV industry can offer and the
23 architects requirement of PV versatility. The confining BPC building program magnifies this issue,
24 showing examples that range from high connection to disengagement of PV in the design process. This
25 disengagement can be seen, for example, in the Millennium Towers, where the PV system is placed
26 vertically on the building's rooftop detached from any significant contribution to the building's
27 architectural design. In other cases, however, there is a strong will to find a common ground by
28 integrating PV into the design process, such as in the Solaire's west façade.

29 4.3.1. The case of the Solaire's west façade

30
31 The Solaire's west façade, shown in Figure 2, could be considered as the most important example at
32 BPC of finding a meeting point between what the PV industry can offer as a product, and its
33 integration into the buildings design process. The Solaire's designers were faced with a design
34 challenge that was unprecedented for their office, which also meant dealing for the first time with trade
35 issues on ownership over the installation of the custom made PV panels. The window installers, the
36 iron worker, and the electrician called for ownership and responsibility over the panel's installation.

1 The debacle was resolved by sending each PV customized panels to an offsite window manufacturer
2 who glazed them into a unit. The panels were then delivered to site and installed by window glaziers as
3 window elements and wired by electricians [22]. This non-programmatic way of operating, whose
4 outcome shows to be the product of an empirical approach, suggests that we are still at a very early
5 phase of PV integration in buildings. Architects and PV producers have to improvise to find solutions
6 and the outcome of PV design integration is highly uncertain.

7 8 4.3.2. PV and glass

9 Arguably, PV is an unlikely architectural component because it still lacks the versatility of most
10 building elements necessary to compose architecture, such as, for example, a brick or a concrete
11 masonry unit. The best way of PV becoming a versatile architectural component, as the architects and
12 PV installer in this study suggest, is to associate PV with glass. The architects state that: “PV is
13 basically glass, and is to be treated as such’ [22] , “PV was considered as a glass surface” [24], “we
14 tend to see PV as a glass element” [25]. The PV installer suggests architects to “consider PV as glass”
15 [21] In fact, PV is treated at BPC either like an add-on glass panel (Tribeca Green, Site 23 and 24, and
16 the Riverhouse) or like an extension of the glass envelope (Solaire, Verdesian, Visionaire.). Although
17 the association glass-PV presents the apparently insurmountable challenge of allowing for
18 transparency while absorbing light energy, many innovative PV producers are already going in this
19 direction. This study suggests that the main advantage of PV as glass is that it would become an
20 architectural component, rather than a system, greatly increasing its versatility in architecture, and
21 hence its ability to be incorporated in the design process.

22 23 4.3.3 Green visible

24 If a PV systems’ main purpose is to generate energy from renewable sources and significantly
25 contribute to a building’s energy demands, then the PV installed at BPC need to be put into question.
26 In fact, the BPCA 2000 Guidelines requirement to provide only 5% of the base energy load, updated in
27 2004 to 0.75% of the building’s base energy loads calculated on the actual PV energy produced, is a
28 small contribution to a building’s energy demands, particularly when compared to the estimated
29 energy potential of BIPV. To put things in perspective, based on a IEA-PVPS report, it is estimated
30 that if building surfaces are used that generate 80% of the maximum solar power, the ratio between
31 BIPV solar electricity production and current electricity consumption can vary from 15% to almost
32 60% in IEA countries [13].

33 At BPC the PV’s purpose of rendering the buildings’ green agenda visible to the public
34 predominates. This intention is already present in the BPCA guidelines [18] which state: “Where
35 appropriate, strongly consider using BIPV in locations that are highly visible to the public” (p.11). PV
36 is evidently considered the primary tool for conveying the green message. This is reinforced by Kaplan
37 who states that PV is “the only renewable energy system that can be seen and understood by people
38 [...] showing to the public a clear wish to be less dependant on non renewable energy sources” [20].
39 The BPC development, however, provides no single comprehensive visual design strategy. According
40 to Kaplan, developers were “required to integrate PV without aesthetically knowing what directions

1 they wanted PV to take them”[20]. The design approach in the BPC buildings is highly diversified: it
2 goes from a full commitment to PV integration within a building’s aesthetics, to simple PV labeling.
3 These two extremes, and the variations in between, are discussed below.

4 5 4.3.4. The two extremes: the Solaire and Millennium Towers

6 In visual terms, the Solaire stands out as the most experimental, risk taking of the BPC buildings
7 considered in this study. The visual engagement of PV starts at street level, with the embedment of PV
8 cells in the entrance canopy, and continues upwards on west façade with the colour variation of the
9 recycled Intel chip cells. There is, in the Solaire, an attention to scale and visual perception. At street
10 level one can see the single PV cells of the canopy, from further away the electric blue panels blend in
11 the west facade. In the Millennium Tower, by contrast, the PV cell array is out of visual reach from the
12 street. Being on the building’s roof top and facing west towards the river, the Millennium tower PV
13 system can only be spotted from an aerial view, as shown in Figure 4b. The design approach in the two
14 buildings goes to the two extremes: fully committed to engage the public in the Solaire, satisfied with
15 just confirming the PV energy requirements in the Millennium Tower.

16 17 18 4.3.5. Variations to the green visible theme

19 The architect’s push towards a green manifesto is well seen in the Visionaire building. Kaplan
20 describes how, during the building’s design development phase, the Visionaire’s architect’s wanted to
21 change the PV colour, from black to blue, and how this would have meant increasing the PV blue cells
22 surface area (to obtain equivalent energy output). It is important to note that the architect, initially
23 resisted to satisfying that revised surface requirement [20]. The event is significant, because it shows
24 the designer’s focus on the PV symbolic role over its energy goal. In the Visionaire, evidently, a
25 symbolic PV blue strip flag sufficed to send the green message.

26 Tribeca Green, the Verdesian and Site 23 and 24 buildings all come under the BPC building
27 typologies that have to rely on the bulkhead and rooftop of the building to guarantee sufficient PV
28 exposure to sunlight. Tribeca Green and Verdesian buildings are, however, the only ones that can
29 count on a certain degree of visibility from the street level. It is perhaps because of this reason that the
30 incorporation of PV in these two buildings is visually incisive. In both instances the PV stand out from
31 the buildings fabric: jet black in Tribeca Green, electric blue in the bulkhead of the Verdesian, both
32 against the buildings’ red brick fabric. The PV of the two buildings must be noticed, even if that means
33 in stark contrast with the buildings’ fabric.

34 In the Riverhouse there is no need to negotiate between PV and building’s composition because the
35 PV systems stand out for what they are: a mechanical device, detached from the building’s main body.
36 The only compositional license in the Riverhouse is the design of fake PV panels in the north façade to
37 complete and crown the building. In the Riverhouse, there is no detachment between PV aesthetics and
38 function. PV is expressed for what it can offer: a machine-like technology that generates energy.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40

5. Conclusion remarks

The research analysis of the PV systems at BPC has led to a series of emerging themes. The content of these themes has led to findings that can be of use to a better understanding of the integration of PV in the architectural design process. These are:

5.1. The ‘carrot and the stick’

Mandating PV in a building’s design process can initially find resistance by architects and developers alike. There is evidence, however, that this can trigger a wider and more consistent application of PV in architecture. The application of PV in a rigid pre-constituted building programme (such as the BPC development) limits the contribution of PV in a building’s design resolution. The study suggests that greater design potential (ability of PV to contribute to a building’s resolution) and greater scope (a more significant contribution to a building’s energy demands) would allow a greater design involvement and push for innovation.

5.2. PV and building integration

The BPC buildings show that PV can assume three different roles: that of energy generators, as substitute to building component, and an aesthetic complement to the building’s composition. In all of the BPC buildings, however, there is a distinct visible separation and prioritization of the roles (including in the Solaire where, to meet the pure energy goals, additional PV arrays have to be added on the roof bulkhead) showing the difficulty in integrating photovoltaic technology and architecture. Depending on the architect’s design approach, PV verge towards aesthetic goals, their function as building components, or as efficient energy generators, but not all of these three things together. The study suggests that, with the current PV technology offered, by releasing one of the PV roles (i.e. that of substituting a building component) it allows PV to work more effectively. This satisfies what is arguably the PV imperative: to generate energy from the sun in the most efficient way possible.

5.3. PV industry and design process

There is a consensus among the architects that the relationship between PV industry and architectural design is a difficult one. In design projects that explore the integration of PV in architecture and push for new solutions, that relationship is still improvised, and the outcome highly uncertain. This calls for a robust programme that will ensure greater control over that relationship while allowing for innovation to take place. PV versatility is key in PV building integration and this can be pursued with PV as a building element. Architects are already associating PV with glazing, suggesting that this is where the technological efforts need to be placed in the evolution of BIPV.

5.4. Green visible

Together with wind turbines, PV is a commonly recognizable form of renewable energy generation system. This is an attractive incentive for architects and developers that want to convey a message of green involvement to the public. The PV overwhelming ability to send the green message with little

1 corresponding substance in energy provision can, however, distract from PV primary function of
2 generating energy.

3

4 Overall, the findings of the research suggest that the integration of PV technology in architecture is
5 still at a raw and early phase, and that PV integration as an organic, constituent part of the design
6 process may require a significant leap in PV technology. Battery Park city is perhaps an expression of
7 the short term goals of PV design integration. These are: to promote PV in the building industry, to
8 build knowledge on the integration PV in the design process, and to render PV green technology
9 visible. A long term goal of PV integration in sustainable architecture, however, must have as primary
10 imperative to make PV generate energy efficiently, and significantly contribute to a building's energy
11 demands.

12

13 Acknowledgements

14 The author of this paper would like to thank the BPCA and all of the architects cited in the text. A
15 particular thanks to Susan Kaplan, which made this study possible in the first place, and to Anthony
16 Pereira for his sustained support. Many thanks also to my colleague, Timothy O. Odeyale, for his
17 precious suggestions in writing the paper.

18

19 References

- 20 1. Thomas, R. *Photovoltaic in Architecture*. Spoon Press: New York, US, 2001.
- 21 2. Prasad, D; Snow, M. *Designing With Solar Power*. The Images Publishing Group PTY Ltd:
22 Melbourne, Australia, 2006.
- 23 3. Weller, B.; Hemmerle, C.; Jakubetz, S.; Unnewehr, S. *Detail Practice: Photovoltaic*. Birkhauser:
24 Basel, Switzerland, 2010.
- 25 4. Krawietz, S. *Building Integration of Photovoltaics: A Guideline for Practical Use*. L Springer:
26 London, UK, 2011.
- 27 5. German Solar Energy Society (DGS). *Planning and Installing Photovoltaic Systems: A Guide*
28 *for Installers, Architects and Engineers*. James and James/Earthscan: London, UK, 2012.
- 29 6. IEA-PVPS. *IEA-PVPS Annual Report (2008, 2009, 2010, 2011)*.
30 <http://www.iea-pvps.org/index.php?id=6> (accessed on 27/11/2012).
- 31 7. IEA-PVPS. *IEA-PVPS Trends in Photovoltaic Applications: Survey report of selected IEA*
32 *countries between 1992 and 2011*. <http://www.iea-pvps.org/index.php?id=32>
33 (accessed on 27/11/2012).

- 1 8. Oliver, M.; Jackson, T. Energy and economic evaluation of building-integrated photovoltaics.
2 *Energy* **2001**, *26*(4), 431-439.
- 3 9. IEA-PVPS. *IEA-PVPS Added Values of Photovoltaic Power Systems, 2001*.
4 http://www.iea-pvps.org/products/rep1_09.htm (accessed on 27/11/2012).
- 5 10. IEA-PVPS. *IEA-PVPS Potential for Building Integrated Photovoltaic, 2002*.
6 [http://www.iea-pvps.org/index.php?id=9&tx_damfertools_pi1\[setCatList\]=61-78](http://www.iea-pvps.org/index.php?id=9&tx_damfertools_pi1[setCatList]=61-78) (accessed on
7 27/11/2012).
- 8 11. Marsh, G. BIPV: innovation puts spotlight on solar. *Renewable Energy Focus* **2008**, *9*(3), 62-67.
- 9 12. IEA-PVPS. *IEA-PVPS Task 7. Photovoltaic power systems in the built environment*.
10 [http://www.iea-pvps.org/index.php?id=53&no_cache=1&sword_list\[\]=integration](http://www.iea-pvps.org/index.php?id=53&no_cache=1&sword_list[]=integration) (accessed on
11 27/11/2012).
- 12 13. Schoen, T.; Prasad, D; Ruoss, D; Eiffert, P; Sørensen, H. Task 7 of the IEA PV power
13 systems program - achievements and outlook. In *17th European Photovoltaic Solar Energy*
14 *Conference* (Munich, Germany), 2001.
- 15 14. IEA-PVPS. *IEA-PVPS Task 10. Urban scale photovoltaic applications*.
16 [http://www.iea-pvps.org/index.php?id=46&no_cache=1&sword_list\[\]=integration](http://www.iea-pvps.org/index.php?id=46&no_cache=1&sword_list[]=integration) (accessed on
17 27/11/2012).
- 18 15. Gaidin, B., Kaan, H., & Munro, D. *Photovoltaics in the Urban Environment*. Earthscan:
19 London, UK, 2009.
- 20 16. Kaan, H., & Reijenga, T. Photovoltaic in an Architectural Context. *Progress in Photovoltaics:*
21 *Research and Applications*, **2004**, *12*(6), 395-408.
- 22 17. Bahaj A.S., James M. F., & Jentsch, M.F. Photovoltaics: added value of architectural integration.
23 *Proceedings of the Institution of Civil Engineers – Energy*, **2007**, *160*(2), 59-69.
- 24 18. BPCA (Battery Park City Authority) (2005). *Hugh L. Carey Battery Park City Authority*
25 *Residential Environmental Guidelines*. New York: BPCA.
- 26 19. USGBC (2010). *US Green Building Council. LEED Rating System*.
27 <http://www.usgbc.org/DisplayPage.aspx?CMSPageID=222> (accessed on 27/11/2012).
- 28 20. Kaplan, S. Interview by S.Medio, September 30, 2009. Digital video retrievable from
29 <http://eprints.lincoln.ac.uk/2583/> (accessed on 27/11/2012).
- 30 21. Pereira, A. Interviewed by S.Medio, October 5, 2009. Digital video file retrievable from
31 <http://eprints.lincoln.ac.uk/2583/> (accessed on 27/11/2012).

1 22. Hess, D. Interviewed by S.Medio October 10, 2009. Digital video file retrievable from
2 <http://eprints.lincoln.ac.uk/2583/> (accessed on 27/11/2012).

3 23. McCormack, B. Interviewed by S.Medio October 6, 2009. Digital video file retrievable from
4 <http://eprints.lincoln.ac.uk/2583/> (accessed on 27/11/2012).

5 24. Kearns, R. Interview by S.Medio September 30, 2009. Digital video file retrievable from
6 <http://eprints.lincoln.ac.uk/2583/> (accessed on 27/11/2012).

7 25. Srivastava, B. Interview by S.Medio September 30, 2009. Digital video file retrievable from
8 <http://eprints.lincoln.ac.uk/2583/> (accessed on 27/11/2012).

9 © 2012 by the authors; licensee MDPI, Basel, Switzerland. This article is an open access article
10 distributed under the terms and conditions of the Creative Commons Attribution license
11 (<http://creativecommons.org/licenses/by/3.0/>).